### **COOLANT ENGINE HEATERS**


# **AUTOTERM FLOW 5D / 5B**

Diesel / Gasoline, 5.0 kw

## **AUTOTERM FLOW 14D**

Diesel, 15.0 kw



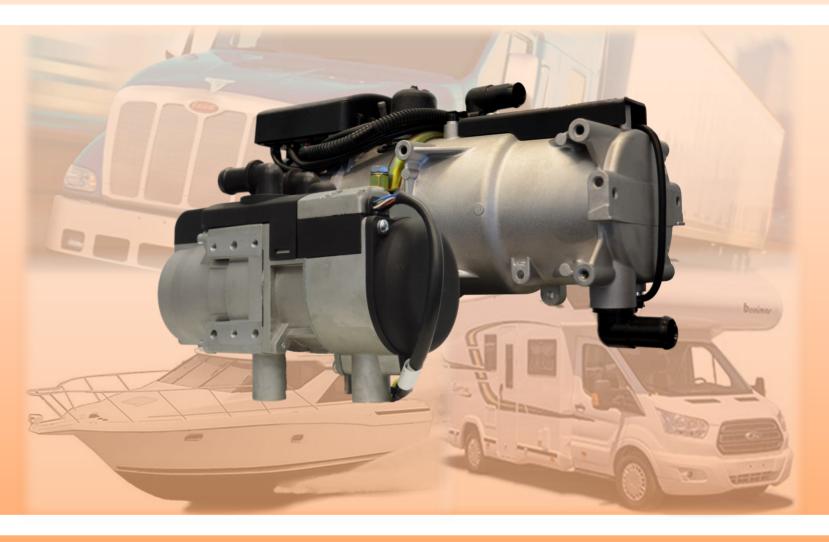

**Coolant heaters AUTOTERM FLOW** provide efficient preheating for engines, hydraulic systems, hot water tanks, and auxiliary heat for cab or cargo space. Their applications vary from any type of vehicles and heavy equipment to boats and motorhomes.

- With the coolant heater you can reduce cost of fuel in compliancy with "no idling zone" regulations
- Coolant heater provides easy engine start at the temperature as low as –45°C
- Coolant heater covers all heating needs for your recreational vehicle or boat
- Each heater comes with installation kit

### **Coolant heater AUTOTERM FLOW:**

- Operates on diesel or gas and 12 V or 24 V power independently from engine
- Extremely low fuel and power consumption
- Provides instant coolant heating up to 80°C
- Fully automated temperature control and programmable starts
- Compact design and "plug-and-play" installation
- Self-diagnostic system



### **TECHNICAL SPECIFICATIONS**

	AUTOTERM FLOW 5D - Diesel
RATED VOLTAGE	12V
FUEL	DIESEL
HEATING CAPACITY	17,000 btu/h (5.0 kW)
COOLANT	ANTIFREEZE
FUEL CONSUMPTION	0.16 gal/h (0.62 l/h)
EL. POWER CONSUMPTION	6.0 A (73.0 W)
WEIGHT	8.8.0 lbs (4.0 kg)
DIMENSIONS (L x W x H)	8.7 x 3.5 x 5.3 in (220 x 90 x 136 mm)
	AUTOTERM FLOW 5B - Gasoline
RATED VOLTAGE	12V
FUEL	GASOLINE
HEATING CAPACITY	17,000 btu/h (5.0 kW)
COOLANT	ANTIFREEZE
FUEL CONSUMPTION	0.18 gal/h (0.7 l/h)
EL. POWER CONSUMPTION	6.0 A (73.0 W)
WEIGHT	8.8 lbs (4.0 kg)
DIMENSIONS (L x W x H)	8.7 x 3.5 x 5.3 in. (220 x 90 x 136 mm)
	AUTOTERM FLOW 14D-12
RATED VOLTAGE	AUTOTERM FLOW 14D-12
RATED VOLTAGE FUEL	
	12V
FUEL	12V DIESEL
FUEL HEATING CAPACITY	12V DIESEL 13,600 - 51,000 btu/h (4.0 - 15.0 kW)
FUEL HEATING CAPACITY COOLANT	12V DIESEL 13,600 - 51,000 btu/h (4.0 - 15.0 kW) ANTIFREEZE
FUEL HEATING CAPACITY COOLANT FUEL CONSUMPTION	12V  DIESEL  13,600 - 51,000 btu/h (4.0 - 15.0 kW)  ANTIFREEZE  0.05 - 0.34 gal/h (0.2 -1.3 l/h)
FUEL HEATING CAPACITY COOLANT FUEL CONSUMPTION EL. POWER CONSUMPTION	12V  DIESEL  13,600 - 51,000 btu/h (4.0 - 15.0 kW)  ANTIFREEZE  0.05 - 0.34 gal/h (0.2 -1.3 l/h)  6.1 - 9.1 A (74.0 - 110.0 W)
FUEL HEATING CAPACITY COOLANT FUEL CONSUMPTION EL. POWER CONSUMPTION WEIGHT	12V DIESEL  13,600 - 51,000 btu/h (4.0 - 15.0 kW) ANTIFREEZE  0.05 - 0.34 gal/h (0.2 -1.3 l/h) 6.1 - 9.1 A (74.0 - 110.0 W)  17.6 lbs (8.0 kg)
FUEL HEATING CAPACITY COOLANT FUEL CONSUMPTION EL. POWER CONSUMPTION WEIGHT	12V  DIESEL  13,600 - 51,000 btu/h (4.0 - 15.0 kW)  ANTIFREEZE  0.05 - 0.34 gal/h (0.2 -1.3 l/h)  6.1 - 9.1 A (74.0 - 110.0 W)  17.6 lbs (8.0 kg)  13.4 x 6.3 x 8.1 in. (340 x 160 x 206 mm)
FUEL HEATING CAPACITY COOLANT FUEL CONSUMPTION EL. POWER CONSUMPTION WEIGHT DIMENSIONS (L x W x H)	12V DIESEL  13,600 - 51,000 btu/h (4.0 - 15.0 kW) ANTIFREEZE  0.05 - 0.34 gal/h (0.2 -1.3 l/h) 6.1 - 9.1 A (74.0 - 110.0 W) 17.6 lbs (8.0 kg) 13.4 x 6.3 x 8.1 in. (340 x 160 x 206 mm)  AUTOTERM FLOW 14D-24
FUEL HEATING CAPACITY COOLANT FUEL CONSUMPTION EL. POWER CONSUMPTION WEIGHT DIMENSIONS (L x W x H)  RATED VOLTAGE	12V DIESEL  13,600 - 51,000 btu/h (4.0 - 15.0 kW) ANTIFREEZE  0.05 - 0.34 gal/h (0.2 -1.3 l/h) 6.1 - 9.1 A (74.0 - 110.0 W) 17.6 lbs (8.0 kg)  13.4 x 6.3 x 8.1 in. (340 x 160 x 206 mm)  AUTOTERM FLOW 14D-24
FUEL HEATING CAPACITY COOLANT FUEL CONSUMPTION EL. POWER CONSUMPTION WEIGHT DIMENSIONS (L x W x H)  RATED VOLTAGE FUEL	12V DIESEL  13,600 - 51,000 btu/h (4.0 - 15.0 kW) ANTIFREEZE  0.05 - 0.34 gal/h (0.2 - 1.3 l/h) 6.1 - 9.1 A (74.0 - 110.0 W) 17.6 lbs (8.0 kg) 13.4 x 6.3 x 8.1 in. (340 x 160 x 206 mm)  AUTOTERM FLOW 14D-24  24V DIESEL
FUEL HEATING CAPACITY COOLANT FUEL CONSUMPTION EL. POWER CONSUMPTION WEIGHT DIMENSIONS (L x W x H)  RATED VOLTAGE FUEL HEATING CAPACITY	12V DIESEL  13,600 - 51,000 btu/h (4.0 - 15.0 kW) ANTIFREEZE  0.05 - 0.34 gal/h (0.2 - 1.3 l/h) 6.1 - 9.1 A (74.0 - 110.0 W) 17.6 lbs (8.0 kg) 13.4 x 6.3 x 8.1 in. (340 x 160 x 206 mm)  AUTOTERM FLOW 14D-24  24V DIESEL  13,600 - 51,000 btu/h (4.0 - 15.0kW)
FUEL  HEATING CAPACITY  COOLANT  FUEL CONSUMPTION  EL. POWER CONSUMPTION  WEIGHT  DIMENSIONS (L x W x H)  RATED VOLTAGE  FUEL  HEATING CAPACITY  COOLANT	12V  DIESEL  13,600 - 51,000 btu/h (4.0 - 15.0 kW)  ANTIFREEZE  0.05 - 0.34 gal/h (0.2 - 1.3 l/h)  6.1 - 9.1 A (74.0 - 110.0 W)  17.6 lbs (8.0 kg)  13.4 x 6.3 x 8.1 in. (340 x 160 x 206 mm)  AUTOTERM FLOW 14D-24  24V  DIESEL  13,600 - 51,000 btu/h (4.0 - 15.0kW)  ANTIFREEZE
FUEL HEATING CAPACITY COOLANT FUEL CONSUMPTION EL. POWER CONSUMPTION WEIGHT DIMENSIONS (L x W x H)  RATED VOLTAGE FUEL HEATING CAPACITY COOLANT FUEL CONSUMPTION	12V DIESEL  13,600 - 51,000 btu/h (4.0 - 15.0 kW) ANTIFREEZE  0.05 - 0.34 gal/h (0.2 - 1.3 l/h) 6.1 - 9.1 A (74.0 - 110.0 W) 17.6 lbs (8.0 kg) 13.4 x 6.3 x 8.1 in. (340 x 160 x 206 mm)  AUTOTERM FLOW 14D-24  24V DIESEL 13,600 - 51,000 btu/h (4.0 - 15.0kW) ANTIFREEZE 0.13 - 0.50 gal/h (0.2 - 1.9 l/h)









PLANAR DISTRIBUTION LTD.

Unit 106-18663 52 Ave. Surrey, BC V3S 8E5

Toll free: 1 (604) 372-3222 Toll free: 1 (844) 259-8591

www.PLANARHEATERS.COM

Contact your local dealer: