FORCED AIR PETROL HEATER



PLANAR / AUTOTERM Air 4B-12



Forced air petrol (gasoline) heater PLANAR / AUTOTERM Air 4B-12

is designed for providing instant heat to the interior of any type of the vehicles, boats, and motorhomes.

- With the air heater Autoterm Air 4B you can reduce cost of fuel in compliancy with "no idling zone" regulations
- The air heater Autoterm Air 4B is a great way to extend your boating season: for boats 30-40 ft. long
- Efficient performance and quiet operation
- Each heater comes with installation kit
- 2-year warranty on parts and labor

Forced air heater PLANAR / AUTOTERM Air 4B-12

- Operates on petrol (gasoline) and 12V power
- Consumes 1 liter of fuel for up to 4 hours of operation
- Generates 13,600 BTU/h with a strong air flow
- Fully automated temperature control and selfdiagnostic system
- Compact design and "plug-and-play" installation

planarheaters.com

PLANAR / AUTOTERM 4B-12

TECHNICAL SPECIFICATIONS

RATED VOLTAGE

HEATING CAPACITY

FUEL CONSUMPTION

EL. POWER CONSUMPTION

DIMENSIONS (L x W x H)

AIR FLOW RATE

WEIGHT, KIT

WEIGHT, HEATER

FUEL


ALTITUDE



Standard kit includes:

- Air heater AIR 4B-12
- Metering fuel pump with fuel lines and wire harness
- Fuel pickup standpipe
- Control panel:
 - automatic temperature control
 - various settings
 - Wire harness assembly
 - Exhaust flexible pipe, stainless
 - Exhaust muffler, stainless
- Combustion air intake silencer
- Set of fasteners and hardware

Instruction manual

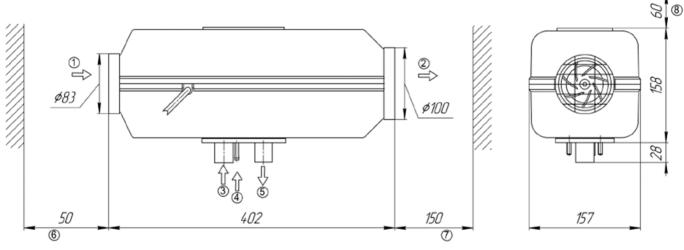

PLANAR / AUTOTERM Air 4B-12

- 1. Heating air intake
- 2. Heating air outlet
- 3. Combustion air intake
- 4. Fuel supply

PLANAR DISTRIBUTION LTD.

Unnit 106 18663 52 Ave. Surrey, BC V3S 8E5 Phone: 1 (604) 372-3222 Toll free: 1 (844) 259-8591 info@planarheaters.com planarheaters.com

- 5. Exhaust gas outlet
- 6. Required gap at heating air intake, min. 50mm

12V

PETROL (GASOLINE)

3300 ft (1000 m)

15.5 lb (10.0 kg)

11.6 lb (5.3 kg)

3,400 - 13,600 btu/h (1.0 - 4.0 kW)

41 - 98 ft³/m (70 - 168m³/h)

0.8 - 5.0 A (10.0 - 56.0 W)

0.04 - 0.14 gal/h (0.15 - 0.5 3l/h)

15.8 x 6.2 x 6.2 in. (402 x 157 x 158 mm)

- 7. Required gap at heating air outlet, min. 150mm
- 8. Required gap for technical maintenance, min. 60mm

Contact your local dealer: